


Car	Audi TTRS 8s / Audi RS3 8v Sportback/Saloon 8v GPF Models/ Audi RS3 8Y Sportback/Saloon 8Y GPF Models	SAUX089
Year	See Table Below	301FK
Notes	Where not supplied use original fittings	Pipe Diameter:- 101mm

Estimated Fitting Time: 4 Hour

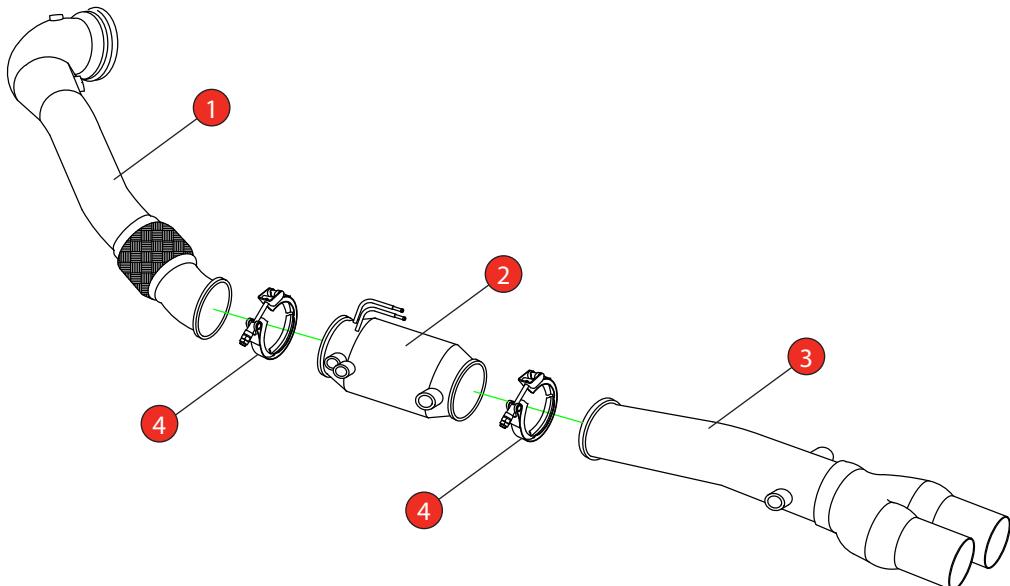

NO.	PART NO.	DESCRIPTION	QTY
1	725AU	Turbo Downpipe	1
2	776AU	Sports Cat Section	1
3	778AU	Y Piece	1

CLASSIFICATION	Motorsport Use Only
HOMOLOGATED	No
DATE	08/01/2025
ISSUE	04
AUTHORISED	G O'Shea

Fit Kit

4	Z016.10072	Ø76mm Quick Release Clamp	2
---	------------	---------------------------	---

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

Fitment Information


MODELS	YEARS
Audi TTRS 8S	2019-2024
Audi RS3 8V Sportback/Saloon 8V GPF Models	2019 - 2020
Audi RS3 8Y Sportback/Saloon 8Y GPF Models	2021-Current



STAY CONNECTED TO RED POWER.

Car	Audi TTRS 8s / Audi RS3 8v Sportback/Saloon 8v GPF Models/ Audi RS3 8Y Sportback/Saloon 8Y GPF Models	SAUX089
Year	See Table	301FK
Notes	Where not supplied use original fittings	Pipe Diameter:- 101mm

Estimated Fitting Time: 4 Hour

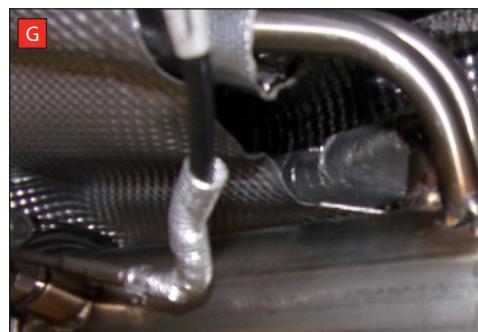

A) Prior to removing the original downpipe the heat shield needs to be removed. The black bracket on the heat shield is no longer required disconnect this by drilling out the two rivets circled in the picture.

B) Re-fit the heat shield once the Scorpion down pipe is fitted.

C) Disconnect the four pressure hoses when removing the original down pipe.

D) Unbolt the original fittings from the original down pipe, and insert these in the two left hand pressure tubes.

E) Fit the two right hand hoses onto the Scorpion sports cat section.

F) Bolt the left hand hoses to the Scorpion sports cat section.

G) Re-fit the heat shield wrap over the hoses and re-fit the propshaft heat shield.

H) Continue to fit the rest of the down-pipe. Once fitted fit the four EGT sensors.